

Eur päisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 821 195 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
28.01.1998 Bulletin 1998/05

(51) Int Cl.⁶: **F17C 13/06, F17C 7/00,
A61M 5/30**

(21) Application number: **97304850.7**

(22) Date of filing: **03.07.1997**

(84) Designated Contracting States:
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE**

(30) Priority: **24.04.1997 GB 9708260**
24.07.1996 GB 9615589

(71) Applicant: **The BOC Group plc**
Windlesham Surrey GU20 6HJ (GB)

(72) Inventors:
• **Shervington, Evelyn**
Petersfield, Hants GU31 5LD (GB)
• **Surman, David**
Guildford, Surrey, GU2 6YG (GB)

• **Birch, David**
Bordon, Hants, GU35 9HB (GB)

(74) Representative: **Gough, Peter et al**
The BOC Group plc
Chertsey Road
Windlesham, Surrey GU20 6HJ (GB)

Remarks:

A request for correction of the numbering of the claims (two claims are numbered as claim 7/the total number of claims after correction is 9) has been filed pursuant to Rule 88 EPC. A decision on the request will be taken during the proceedings before the Examining Division (Guidelines for Examination in the EPO, A-V, 3.).

(54) **Gas capsule and gas delivery system**

(57) A capsule 4 for storing a fluid for example helium under pressure comprises a hollow body from which extends a hollow neck 12. A stopper 5 engages with the neck in a fluid tight manner. The stopper 5 includes a main hollow portion 13 and a stem 10 extending outwardly from the main hollow portion. The root 14 of the stem 10 where it joins the main hollow portion 13 forms a frangible section which when broken will allow fluid in the capsule to escape under pressure.

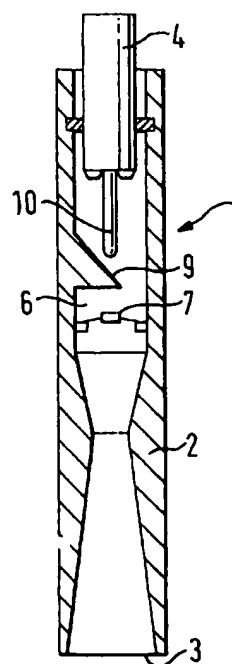


FIG. 1

EP 0 821 195 A2

medical device including a gas delivery system of the present invention;

Figure 2 is a side view of a hollow neck together with a stopper of a capsule for storing a fluid under pressure;

Figure 3 is a diagrammatic sketch of a further needle-less medical device including a gas delivery system of the present invention.

Figure 4 is a plan view of a second embodiment of a capsule for storing a fluid under pressure;

Figure 5 is a cross-section through a hollow body forming part of the capsule of Figure 4, and

Figure 6 is a cross-section through a stopper forming part of the capsule of Figure 4

As shown in Figure 1, a needle-less medical device is in the form of a needle-less syringe 1 which comprises essentially a casing 2 in the form of an elongate hollow tube open at a distal end to define an outlet 3. The casing 2 contains a gas capsule 4 having a hollow body for storing a fluid, for example, helium under high pressure, that is between 60 and 80 bar. An inclined surface 9 is formed on the interior of the surface of the casing 2 spaced from but adjacent to a solid stem 10 extending from a stopper 5 of the gas capsule 4. The gas capsule 4 is so mounted within the casing 2 that when a finger pressure is applied to the proximal end of the gas capsule 4 the capsule will move downwardly (as shown) until the stem 10 of the stopper 5 strikes the surface 9. Within the casing 2 adjacent the stem 10 of the stopper 5 there is formed a chamber 6 for receiving a powdered agent, for example, a drug 7.

Referring also to Figure 2, the stopper 5 which is laser welded within a hollow neck 12 of the gas capsule 4 includes a main hollow body part 13 from which extends the stem 10. The root 14 of the stem 10 where it is joined to the main hollow body 13 forms a frangible section 16. It will be apparent that the interior of the main hollow body 13 is in communication with the hollow interior of the gas capsule 4.

In use, when it is desired to treat a patient by means of the syringe 1, the drug 7 is placed in the chamber 6 and the outlet 3 is placed against the skin of the patient. Finger pressure is applied to the proximal (upper as shown) end of the gas capsule 4 which causes the capsule 4 to move downwardly until the stem 10 of the stopper 5 engages the inclined surface 9 thereby rupturing about the frangible section 16 with the subsequent release of helium. The released helium passes out from the capsule 4 into the chamber 6 where it entrains the powdered drug 7. The helium with the entrained powdered drug 7 then passes through the outlet 3 with the drug passing through the skin of the patient whilst the

light molecules of helium bounce off the skin into the atmosphere.

Referring now to Figure 3, a needle-less medical device in the form of a needle-less syringe 31 comprises essentially a casing 32 in the form of an elongate hollow tube open (when in use) at a distal end to define an outlet 33 but prior to use covered by a cap 34. The opposite proximal (upper as shown) end, is sealed. As with the embodiment illustrated in Figure 1 the casing 32 contains a gas capsule 4 located adjacent the sealed proximal end of the casing. The gas capsule 4 has a hollow body for storing a fluid, for example, helium under high pressure, that is, between 60 and 80 bar, and a stopper which includes a solid stem 10 extending outwardly (downwardly) as shown from the stopper of the gas capsule 4.

An actuator member 35 is mounted for sliding movement on the casing 32 which includes an inclined surface 36 located adjacent the free end of the stem 10. The member 35 also includes two wings 37 extending outwardly from the casing 32.

Within the casing 32 adjacent the free end of the stem 10 there is formed a chamber 38 for receiving a powdered drug mounted on a membrane 39.

In use, when it is desired to treat a patient by means of the syringe 31, the powdered drug is placed on the membrane 39 within the chamber 38, the cap 34 is removed and the outlet 33 is placed against the skin of a patient. Finger pressure is applied to the wings 37 to slide the actuator member 35 upwardly (as shown) relative to the casing 32 thereby to cause the inclined surface 36 to engage and apply a lateral force to the stem 10. This will cause the stem 10 to rupture about the frangible section 16 with the subsequent release of helium. As with the embodiment illustrated in Figure 1, the helium with the entrained powdered drug will burst the membrane 39 and pass through the outlet 33 with the drug passing through the skin of the patient whilst the light molecules bounce off the skin into the atmosphere.

An advantage of this embodiment is, that since the upper (as shown) end of the casing 32 is sealed, the gas capsule 4 will be held in place when the stem 10 is ruptured so that it does not fly out from the casing 32 due to the reaction force of the escaping helium.

The hollow body of the gas capsule 4 together with the stopper 5 may be made from aluminium or aluminium alloy and, if necessary the body of the capsule may be reinforced with an outer layer of a different material which could be in the form of a lattice wound tightly around a substantial part of the hollow body.

It will be appreciated that the capsule 4 described is relatively easy to manufacture and the design of the stopper 5 is such that when the frangible section 16 is ruptured it will leave a relatively large orifice through which the helium can escape.

Referring now to Figures 4, 5 and 6 a second embodiment of gas capsule 4' is illustrated which includes a hollow body 40 for storing a fluid, for example helium

medical device including a gas delivery system of the present invention;

Figure 2 is a side view of a hollow neck together with a stopper of a capsule for storing a fluid under pressure;

Figure 3 is a diagrammatic sketch of a further needle-less medical device including a gas delivery system of the present invention.

Figure 4 is a plan view of a second embodiment of a capsule for storing a fluid under pressure;

Figure 5 is a cross-section through a hollow body forming part of the capsule of Figure 4, and

Figure 6 is a cross-section through a stopper forming part of the capsule of Figure 4

As shown in Figure 1, a needle-less medical device is in the form of a needle-less syringe 1 which comprises essentially a casing 2 in the form of an elongate hollow tube open at a distal end to define an outlet 3. The casing 2 contains a gas capsule 4 having a hollow body for storing a fluid, for example, helium under high pressure, that is between 60 and 80 bar. An inclined surface 9 is formed on the interior of the surface of the casing 2 spaced from but adjacent to a solid stem 10 extending from a stopper 5 of the gas capsule 4. The gas capsule 4 is so mounted within the casing 2 that when a finger pressure is applied to the proximal end of the gas capsule 4 the capsule will move downwardly (as shown) until the stem 10 of the stopper 5 strikes the surface 9. Within the casing 2 adjacent the stem 10 of the stopper 5 there is formed a chamber 6 for receiving a powdered agent, for example, a drug 7.

Referring also to Figure 2, the stopper 5 which is laser welded within a hollow neck 12 of the gas capsule 4 includes a main hollow body part 13 from which extends the stem 10. The root 14 of the stem 10 where it is joined to the main hollow body 13 forms a frangible section 16. It will be apparent that the interior of the main hollow body 13 is in communication with the hollow interior of the gas capsule 4.

In use, when it is desired to treat a patient by means of the syringe 1, the drug 7 is placed in the chamber 6 and the outlet 3 is placed against the skin of the patient. Finger pressure is applied to the proximal (upper as shown) end of the gas capsule 4 which causes the capsule 4 to move downwardly until the stem 10 of the stopper 5 engages the inclined surface 9 thereby rupturing about the frangible section 16 with the subsequent release of helium. The released helium passes out from the capsule 4 into the chamber 6 where it entrains the powdered drug 7. The helium with the entrained powdered drug 7 then passes through the outlet 3 with the drug passing through the skin of the patient whilst the

light molecules of helium bounce off the skin into the atmosphere.

Referring now to Figure 3, a needle-less medical device in the form of a needle-less syringe 31 comprises essentially a casing 32 in the form of an elongate hollow tube open (when in use) at a distal end to define an outlet 33 but prior to use covered by a cap 34. The opposite proximal (upper as shown) end, is sealed. As with the embodiment illustrated in Figure 1 the casing 32 contains a gas capsule 4 located adjacent the sealed proximal end of the casing. The gas capsule 4 has a hollow body for storing a fluid, for example, helium under high pressure, that is, between 60 and 80 bar, and a stopper which includes a solid stem 10 extending outwardly (downwardly) as shown from the stopper of the gas capsule 4.

An actuator member 35 is mounted for sliding movement on the casing 32 which includes an inclined surface 36 located adjacent the free end of the stem 10. The member 35 also includes two wings 37 extending outwardly from the casing 32.

Within the casing 32 adjacent the free end of the stem 10 there is formed a chamber 38 for receiving a powdered drug mounted on a membrane 39.

In use, when it is desired to treat a patient by means of the syringe 31, the powdered drug is placed on the membrane 39 within the chamber 38, the cap 34 is removed and the outlet 33 is placed against the skin of a patient. Finger pressure is applied to the wings 37 to slide the actuator member 35 upwardly (as shown) relative to the casing 32 thereby to cause the inclined surface 36 to engage and apply a lateral force to the stem 10. This will cause the stem 10 to rupture about the frangible section 16 with the subsequent release of helium. As with the embodiment illustrated in Figure 1, the helium with the entrained powdered drug will burst the membrane 39 and pass through the outlet 33 with the drug passing through the skin of the patient whilst the light molecules bounce off the skin into the atmosphere.

An advantage of this embodiment is, that since the upper (as shown) end of the casing 32 is sealed, the gas capsule 4 will be held in place when the stem 10 is ruptured so that it does not fly out from the casing 32 due to the reaction force of the escaping helium.

The hollow body of the gas capsule 4 together with the stopper 5 may be made from aluminium or aluminium alloy and, if necessary the body of the capsule may be reinforced with an outer layer of a different material which could be in the form of a lattice wound tightly around a substantial part of the hollow body.

It will be appreciated that the capsule 4 described is relatively easy to manufacture and the design of the stopper 5 is such that when the frangible section 16 is ruptured it will leave a relatively large orifice through which the helium can escape.

Referring now to Figures 4, 5 and 6 a second embodiment of gas capsule 4' is illustrated which includes a hollow body 40 for storing a fluid, for example helium

under high pressure, that is between 60 and 80 bar. As illustrated best in Figure 5 the hollow body 40 terminates at one end in a hollow neck 42.

A stopper 45 best illustrated in Figure 6 includes a main hollow portion 43 from which extends a hollow stem 60. The root 64 of the stem 60 where it is joined to the main hollow portion 43 forms a frangible section 66. As shown in Figure 4, the main hollow portion 43 of the stopper 45 is fitted over the hollow neck 42 and laser welded to form a fluid tight joint.

The hollow body 40 of the gas capsule 4' together with the stopper 45 may be made from aluminium or an alloy of aluminium.

It will be apparent that the capsule 4' is intended to be used with the needle-less syringes 1 and 31 in the same manner as gas capsule 4.

Although reference has been made to the use of the capsules 4, 4' with a needle-less syringe for medical purposes, there are a number of other applications where the force of the contained fluid can be utilised. For example, in the inflation of balloons bearing fluorescent markings for identification by radar and for the inflation of life jacket dinghies.

The energy of the pressurised fluid could also be utilised in a weapon to act as a propellant for a bullet or other projectile.

Furthermore, the force of the fluid under pressure can be employed to dispense a substance such as discharging draft beer from a beer dispenser, or expelling soda water from a soda siphon.

Claims

1. A capsule 4 for storing a fluid under pressure, comprising a hollow body with a neck 12 extending therefrom and a stopper 5, the stopper 5 and the neck 12 fitting together in a fluid tight manner, the stopper 5 comprising a main hollow portion 13 and a stem 10 extending outwardly from the main hollow portion, the root 14 of the stem 10 where it joins the main hollow portion 13 forming a frangible section 16 which, when broken, will allow the fluid under pressure to escape from the capsule 4.

2. A capsule as claimed in claim 1, in which the main hollow portion 13 of the stopper 5 is located within the neck 12 in a fluid tight manner the interior of which main hollow portion is in communication with the interior of the hollow body.

3. A capsule as claimed in claim 2, in which the stem 10 is solid.

4. A capsule as claimed in claim 1, in which the main hollow portion 43 of the stopper 45 is located over the neck in a fluid tight manner.




5. A capsule as claimed in claim 4, in which the stem 60 is hollow.

6. A capsule as claimed in any one of claims 1 to 5, in which the capsule is made from aluminium or an aluminium alloy.

7. A gas delivery system comprising a casing 2 formed with an outlet 3 and containing a capsule 4 for storing a fluid under pressure, the capsule 4 having a hollow body with a neck 12 extending therefrom and a stopper 5, the stopper 5 and the neck fitting 12 together in a fluid tight manner, the stopper 5 comprising a main hollow portion 13 and a stem 10 extending outwardly from the main hollow portion, the root 14 of the stem 10 where it joins the main hollow portion 13 forming a frangible section 16, and mechanical means 9 arranged within the casing 2 for rupturing the frangible section 16 thereby allowing the escape of the fluid from the capsule 4 which exits through the outlet 3 of the casing 2.

7. A gas delivery system as claimed in claim 6, in which the mechanical means includes an inclined surface 9 for engaging and thereby exerting a lateral force on the stem 10 for rupturing the frangible section 16.

8. A gas delivery system as claimed in claim 7, in which the inclined surface 36 forms part of an actuating member 35 slidably mounted on the casing 32 between a first position in which the inclined surface 36 is spaced from the stem 10 and a second position in which the inclined surface 36 engages the stem 10.

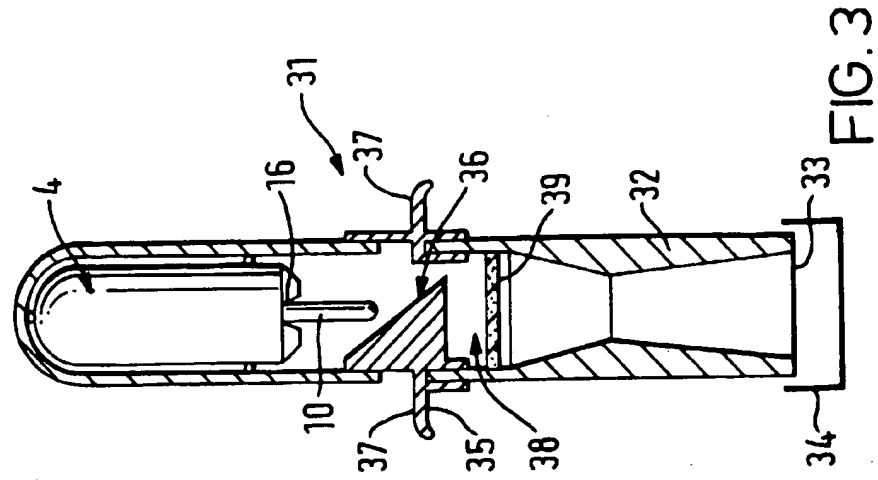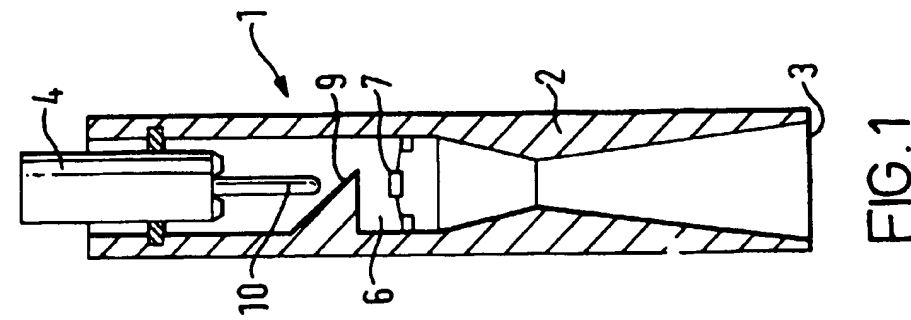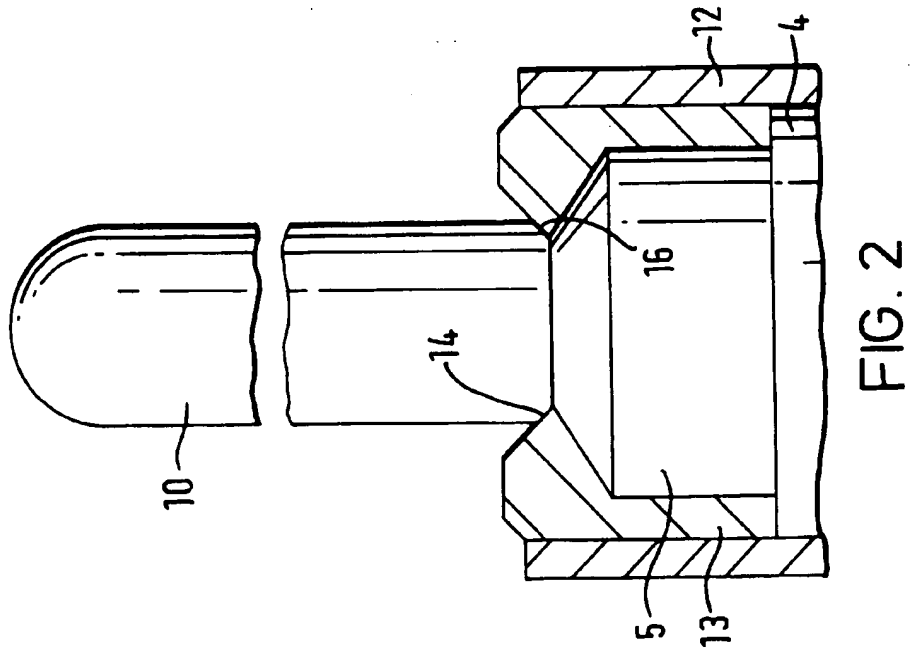

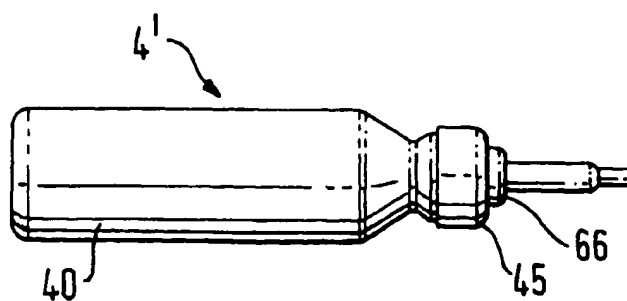


FIG. 4

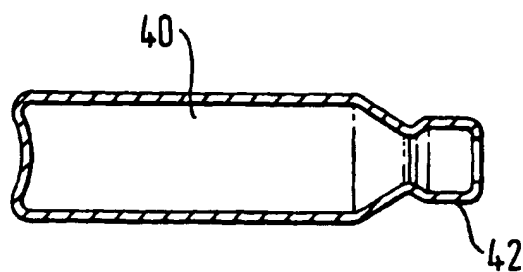


FIG. 5

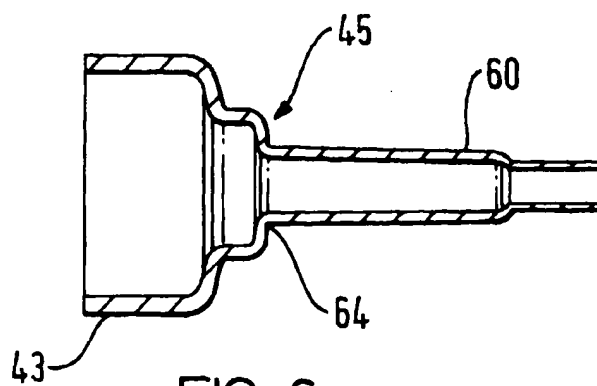


FIG. 6